


SR-MT Installation Instructions v.6.3

Tools needed: 2) 7/16" Either sockets or open end wrenches, and 2) 9/16" Either sockets or open end wrenches

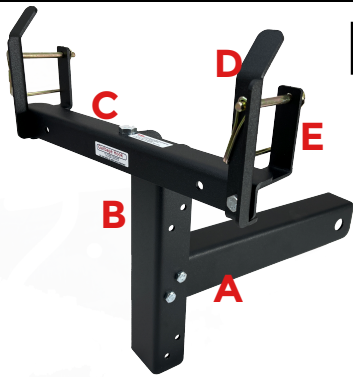

MAIN COMPONENTS

- A** Receiver Base
- B** Adjustable Upright
- C** 12" Support Arm
- D** 2) Standard Hooks
- E** 2) Retainer Bracket

FASTENERS

- F** 6) 1/4" x 3/4" bolts, nuts and lock washers
- G** 1) 3/8" x 1" bolt, and lock nut
- H** 2) Quick Release Dent Pins



F



G



H




Scan for
Installation Video



Base Assembly

Parts: A, B, H

- The receiver base (**A**) bend will go down, and slip into the adjustable upright (**B**).
- Adjustable upright (**B**) channel will wrap around the receiver base (**A**) and holes will line up.
- Attach the upright (**B**) and receiver base (**A**) using 4) 1/4 x 3/4" bolts, lock washer & nuts. (**H**)
- Adjustable upright (**A**) will allow for 3 height settings. Height can always be reset for the best operating height. **We suggest heights between 14"- 21" allowing for approximately 30% of the cans weight to be resting on the support arm (C), with a max of 75 LBS. weight on the arm per can.**

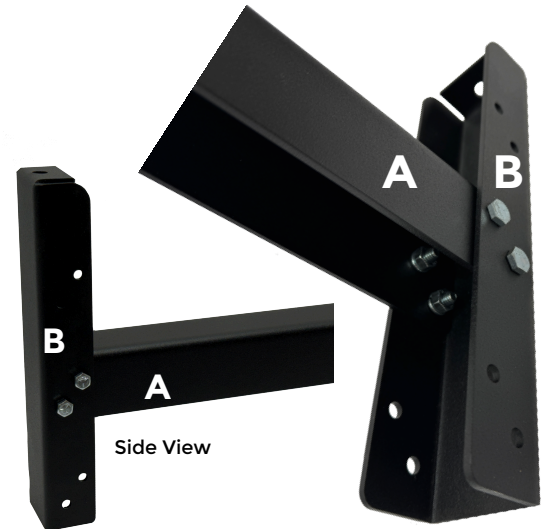

Under Side View





Arm Assembly

Parts: C, D, E, H

There are two hook settings the support arm (**C**); the outer holes are 12" and the inside hole will be 9"


- Mount the two standard hooks (**D**) using the 1/4" x 3/4" bolts, lock washers and nuts (**F**)
- Standard hooks (**D**) mount on the face of the support arm (**C**), the lower tab will wrap under the bottom edge of the support arm (**C**)
- This would be the time to attach the lasso and quick release pin (lasso sold separately)
- The rear retainer bracket (**E**) installs behind and under the support arm (**C**)
- **NOTE:** Push the retainer bracket (**D**) tight to the underside so it will stay straight and in line with the hook
- Tighten the bolts so the hooks will not move

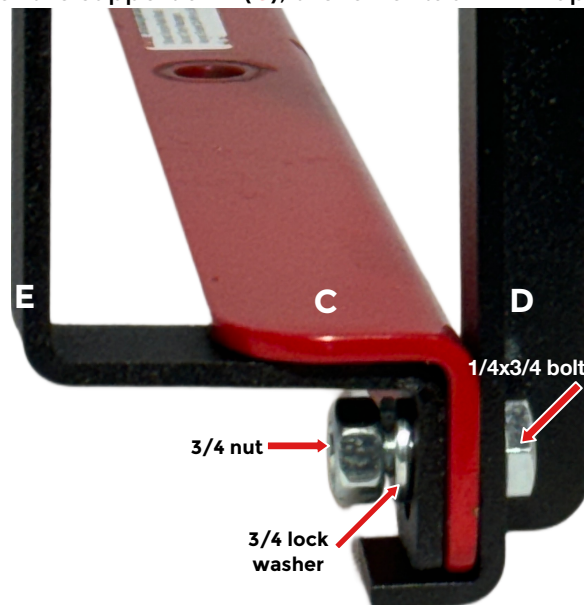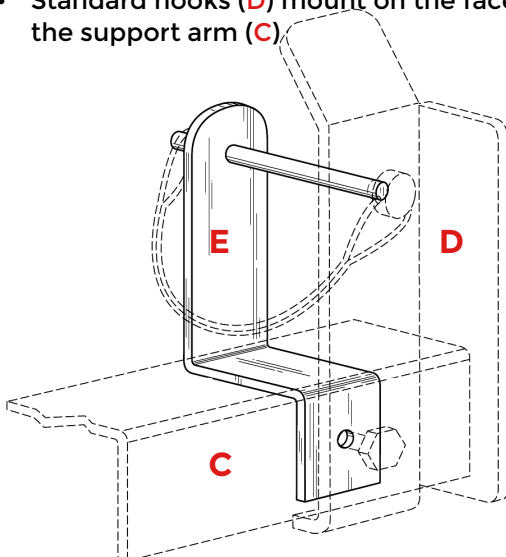



Final Assembly

- Take the assembled upright (B) and receiver base (A), and attach the support arm (C)
- Using the 3/8 x 3/4" bolt, and lock nut (G) to secure support arm (C) to the tab on top of the adjustable upright (B).

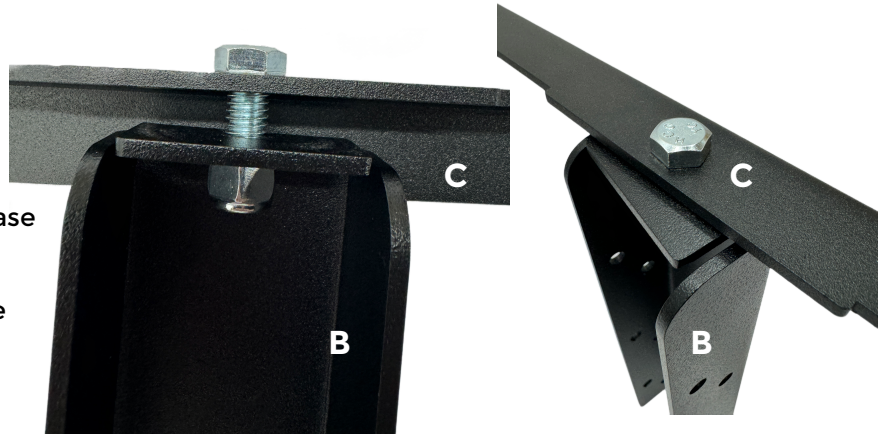

TIGHTEN SNUG, so the arm is not loose and moves harder, but can still pivot. **Allowing the support arm to swivel on the base but not wobble.**

When transporting your wheeled cans on steep or challenging grades, we recommend securing the handle using all clips that comes standard with your order.

Warnings:

- Keep all nuts tightened • Do Not exceed 15 MPH, or 75 LBS • Do Not carry passengers • Do Not use on public roads
- Turn off vehicle and put in park before attaching your Garbage Hook.

****Garbage Hooks are designed for towing, DO NOT backup with cans attached. Damage may accrue****

Warranty:

We understand that sometimes products may not meet your expectations which is why we offer a warranty period during which you can return the product for a full credit or replacement. Just fill out the form and we can issue you a return label or refund.

<https://www.garbagecommander.com/warranty>



If you have any questions, concerns or suggestions with your order, call or text us at 608-607-2788
Send an email to info@garabgecommander.com

Before leaving a negative review, contact us, we promise to make things right with you.
Help us grow by spreading the word and taking the time to leave a positive review.



HAUL

The solution to the long or steep driveway



PROTECT

Secure your garbage with ease



DEODORIZE

Helps eliminate odors fast



Thank you for your order, as a small company we truly appreciate your business!

LaMalco LLC - 2709 N. Burdick Rd. Janesville, WI. 53548 | Garbage Hooks are patented and made in the USA. | Patent US 9,566,837 B1 US 9,789,741 B1 & D888,644S

